



# QPD4-0-18000-R5-S

4-Way, DC~18GHz

Features: \* Small Size Applications:
\* Amplifiers
\* Mixers

\* Low Insertion Loss

\* Antennas \* Laboratory Test

## **Electrical**

Frequency: DC~18GHz
VSWR: 1.8 max.
Insertion Loss: 12±2.8dB
Average Power: 0.5W

Impedance:  $50\Omega$ 

## Mechanical

Size\*1: 54\*32\*12mm


2.126\*1.26\*0.472in

Connectors: SMA Female

Mounting: 2-Φ2.8mm through-hole

[1] Exclude connectors.

## **Outline Drawings**

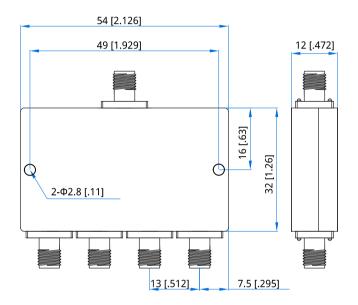

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### **How To Order**

QPD4-0-18000-R5-S

Customization is available upon request.