

# QPD8-1525-1850-K1-N

## 8-Way, 1.525~1.85GHz

**Features:**

- \* Small Size
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

**Electrical**

Frequency:	1.525~1.85GHz
Insertion Loss:	0.8dB max.
Input VSWR:	1.2 max.
Output VSWR:	1.2 max.
Isolation:	18dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	±4°
Impedance:	50Ω
Average Power:	100W max. 10W max. as combiner

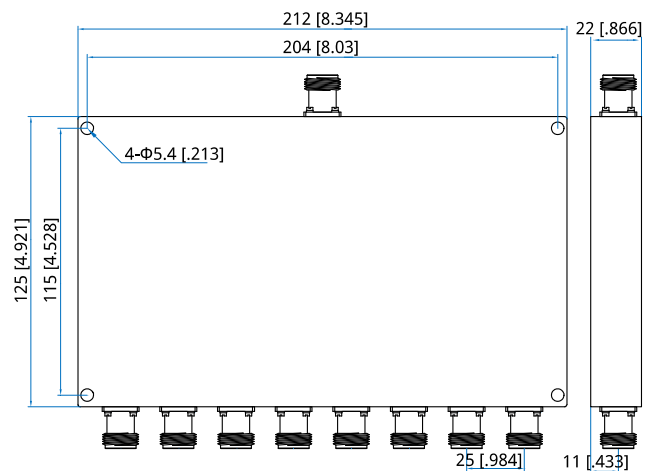
**Mechanical**

Size*1:	125*212*22mm 4.921*8.345*0.866in
Connectors:	N Female
Mounting:	4-Φ5.4mm through-hole

[1] Exclude connectors.

**Environmental**

Operation Temperature:	-35~+75°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**QPD8-1525-1850-K1-N**

Customization is available upon request.