






For reference only. See data sheet for the detailed specifications.

Technical Specification

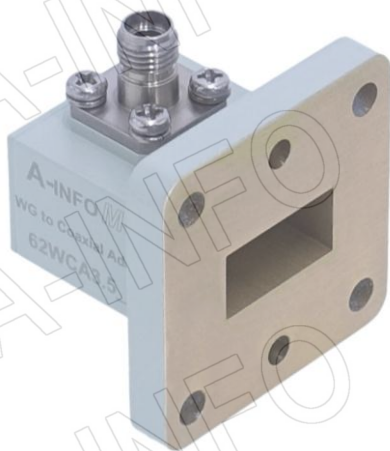

EIA WR	WR62
Frequency Range(GHz)	12.4 – 18.0
Insertion Loss(dB)	0.27 Max.
VSWR	1.35:1 Max.
Flange	APF62
Connector	3.5mm-Female
Average Power(W CW)	50
Peak Power(KW)	0.1
Material	Al
Size(mm)	27 x 33.3 x 35.1
Net Weight(Kg)	0.04 Around

Outline Drawing (Size: mm)

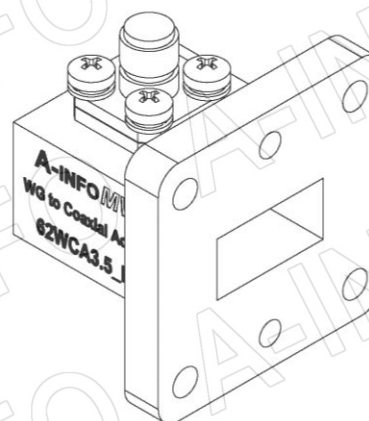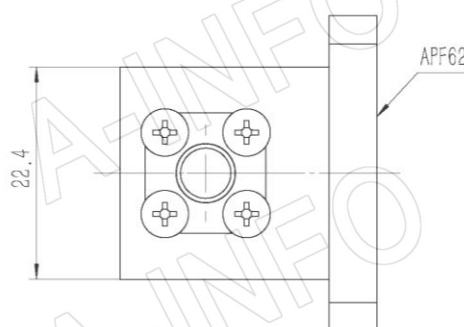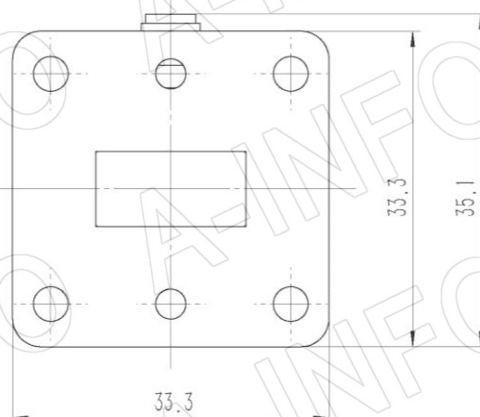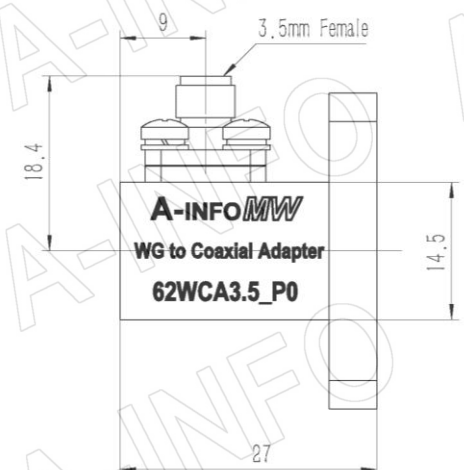

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,


(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Page 1 of 3

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Flange Drawing (Size: mm)

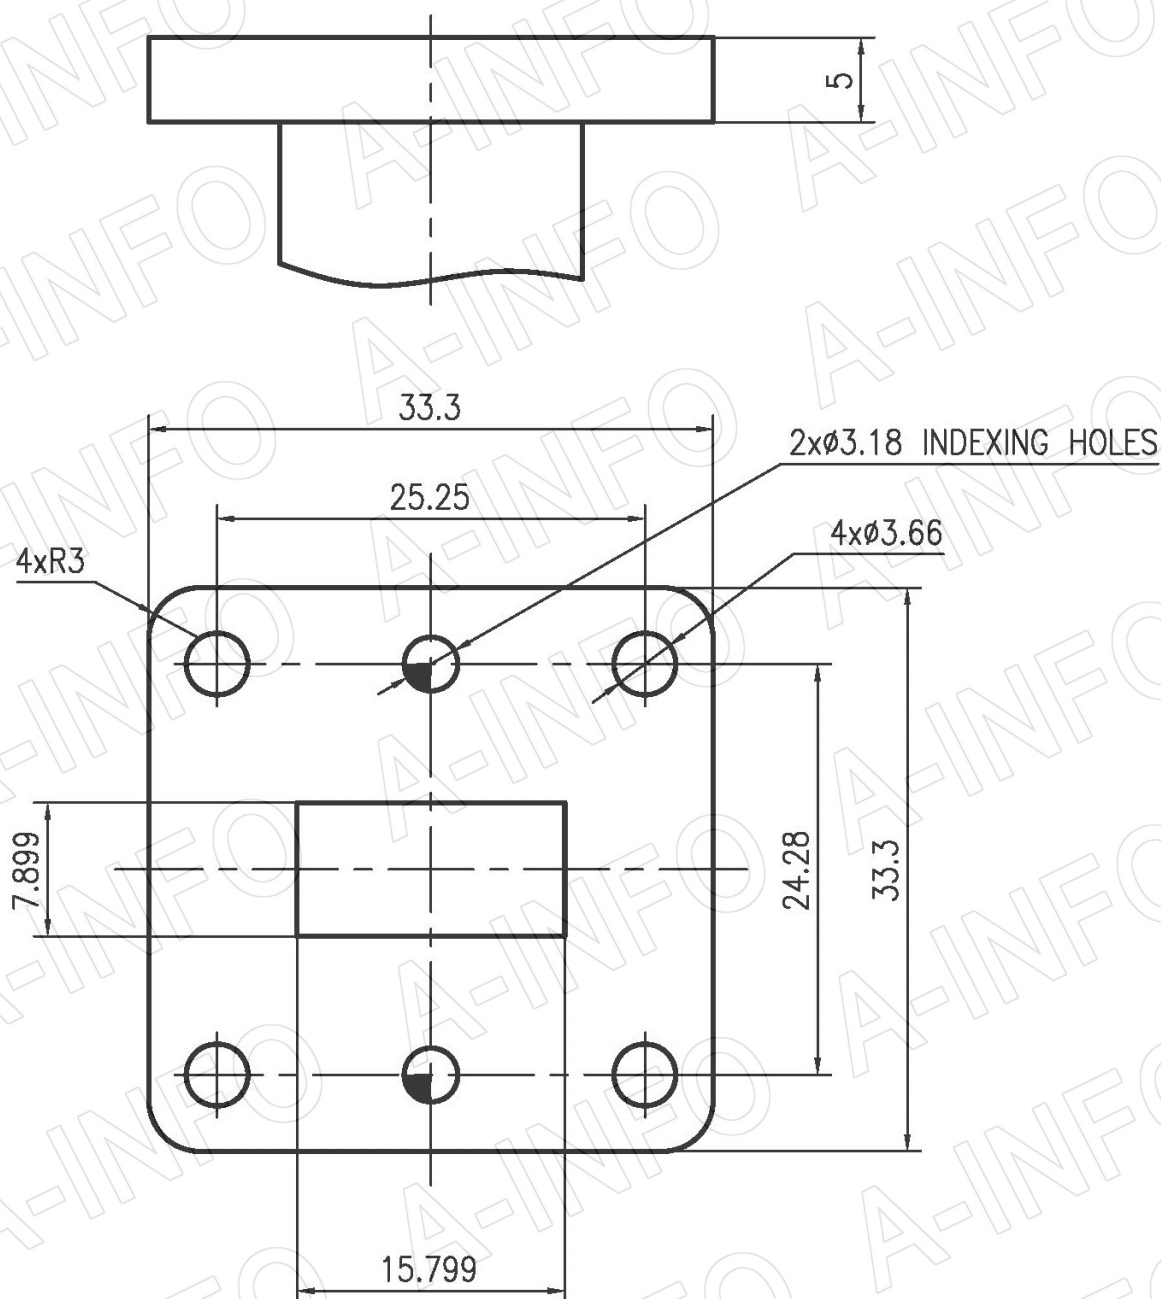

APF62

AINFO Inc.

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA : Tel: (+1) 949-639-9688,


Page 2 of 3

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Test Results

I. L. (Test with two adapters back to back)

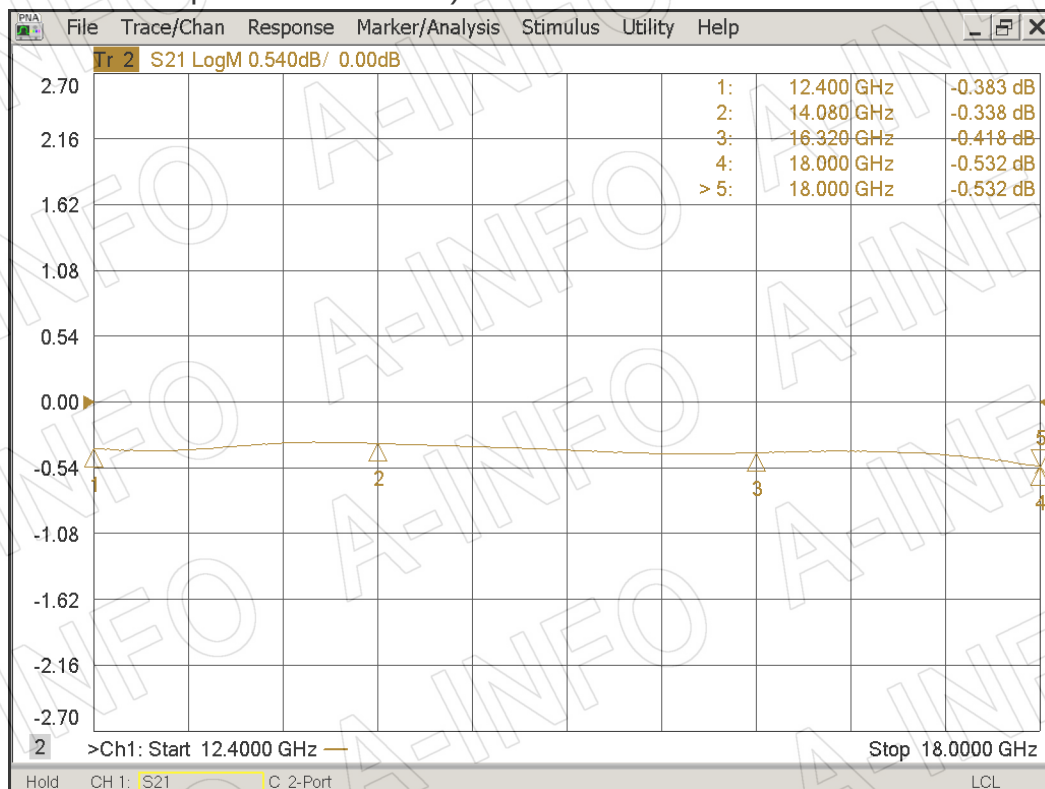

VSWR

