


For reference only. See data sheet for the detailed specifications.

Technical Specification




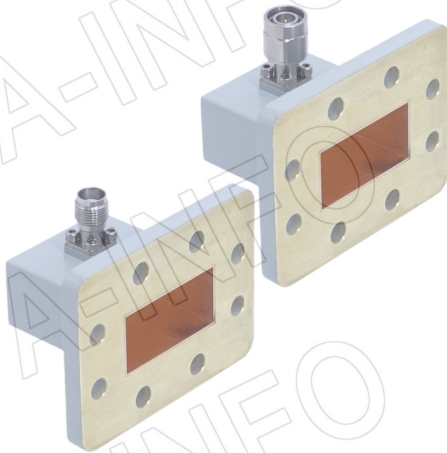


EIA WR	WR159
Frequency Range(GHz)	4.90 – 7.05
Insertion Loss(dB)	0.16 Max.
VSWR	1.25:1 Max.
Flange	FDP58(UDR58)
Connector	TNC-Female or TNC-Male
Average Power(W CW)	150 Max.
Peak Power(KW)	3
Material	Cu
Size(mm)	50 x 81 x 64.9
Net Weight(Kg)	0.37 Around

Outline Drawing (Size: mm)

TNC-Female Output (P/N: 159WCAT_Cu)

For TNC-Male output outline drawing, please contact A-INFO.

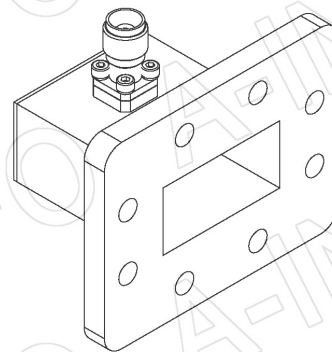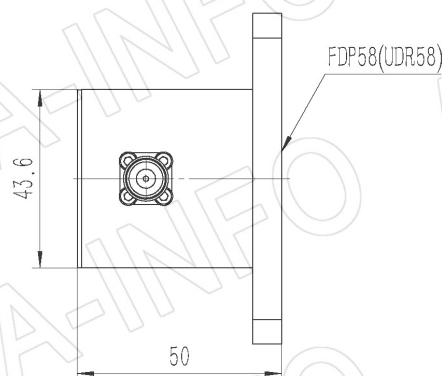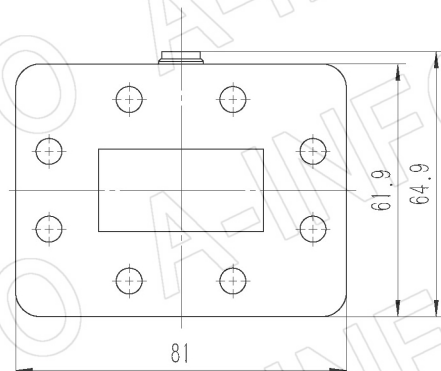

AINFO Inc.


China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA : Tel: (+1) 949-639-9688,

Page 1 of 3

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com


Flange Drawing (Size: mm)

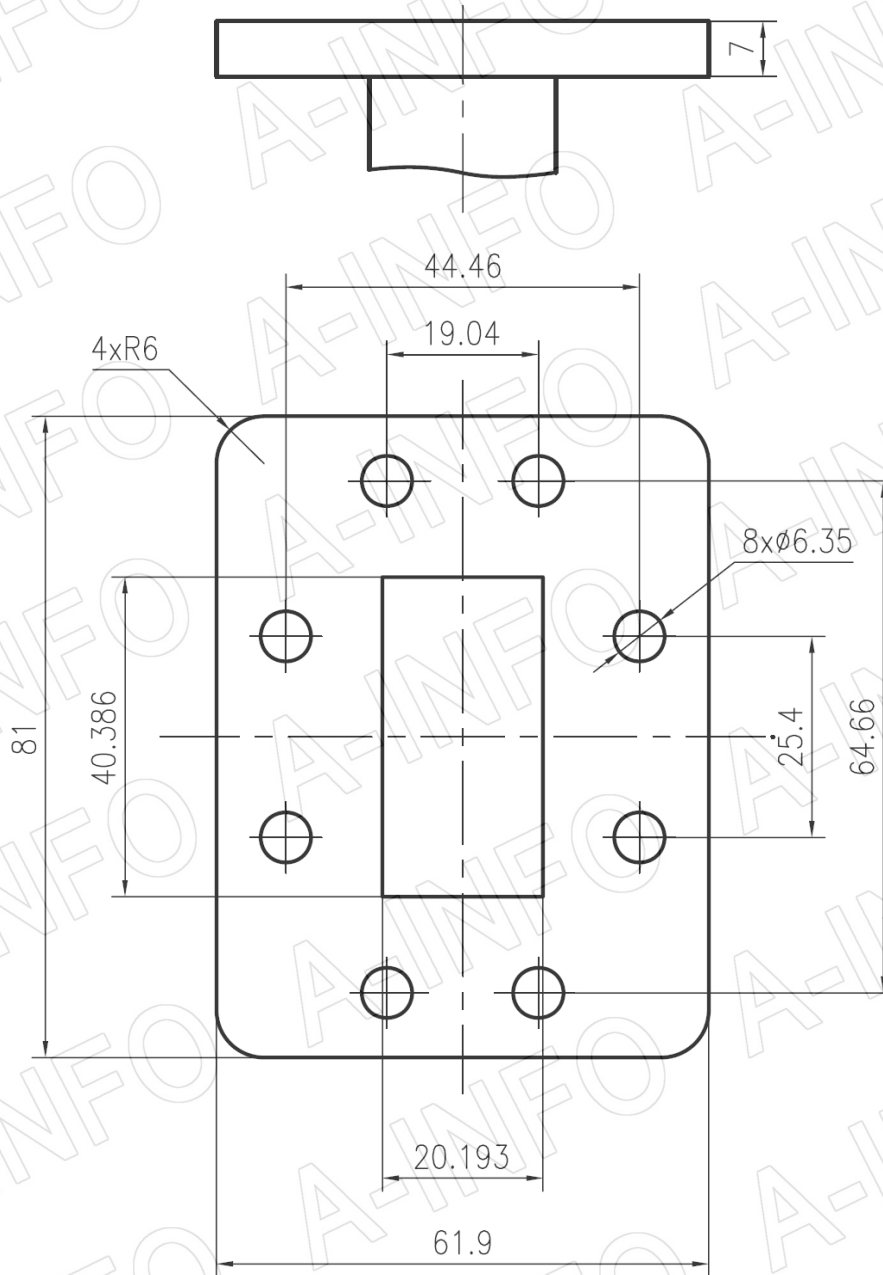

FDP58

Test Results

Insertion Loss (Test with two adapters back to back)

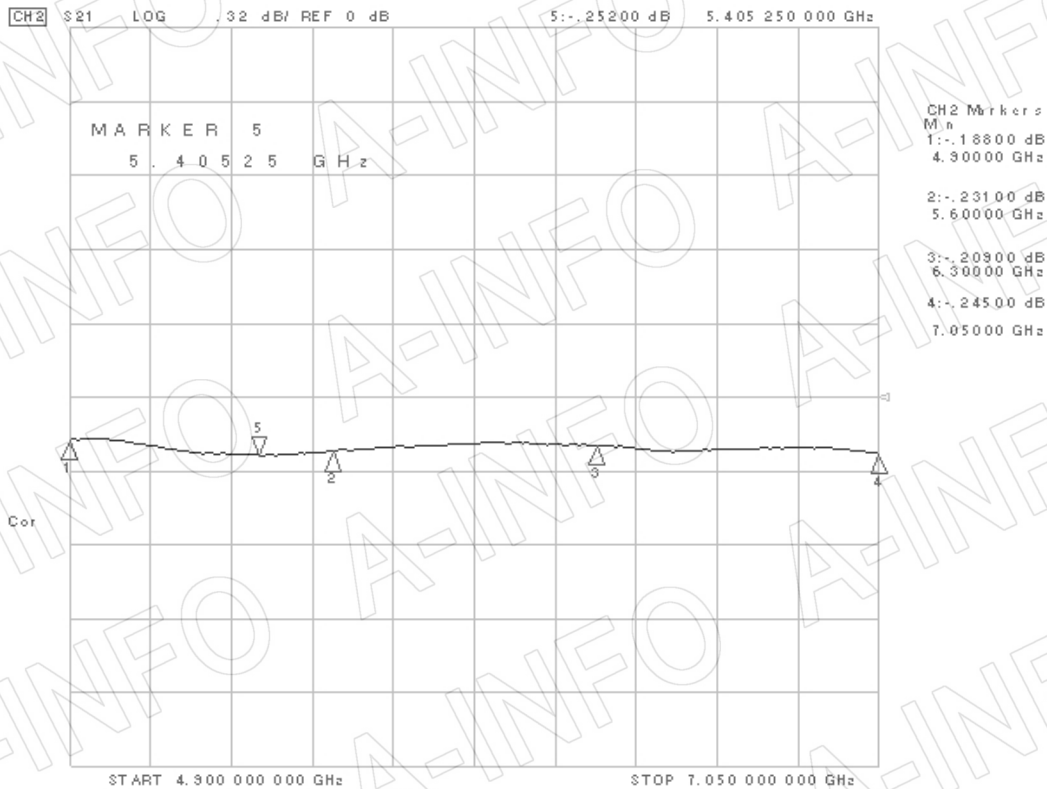

VSWR

