


GL 300.08

Cutaway model: multiple-disk clutch

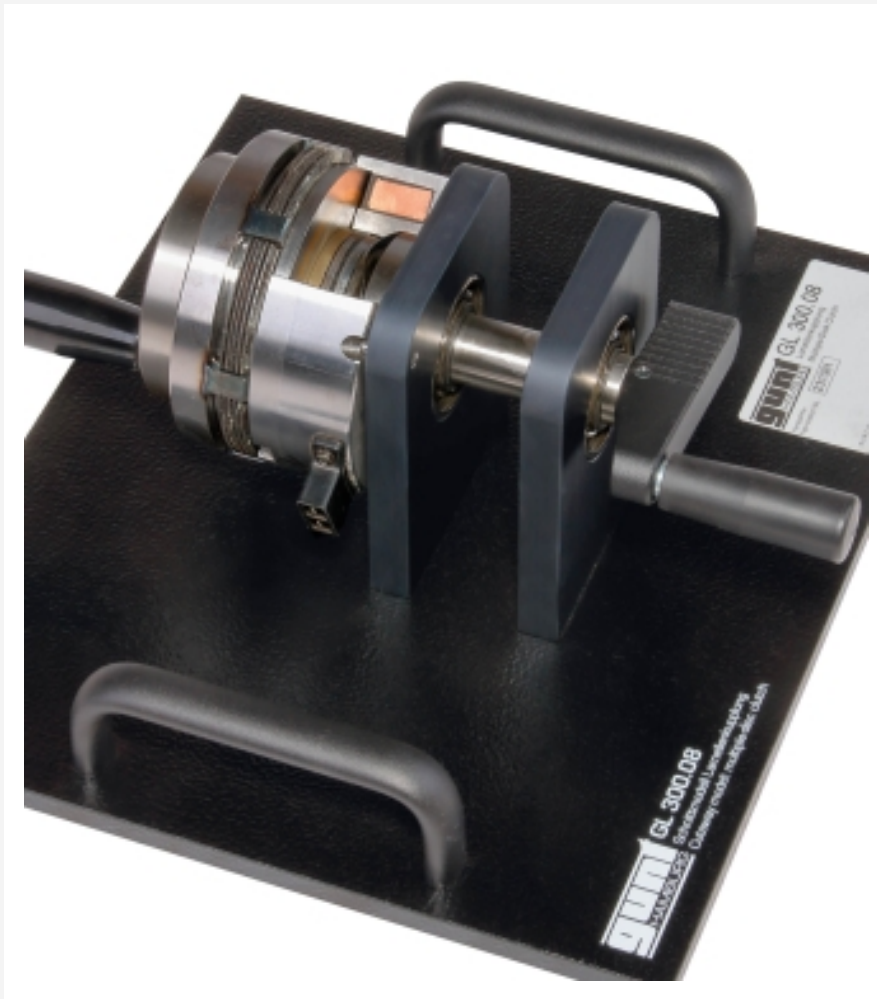

Learning objectives/experiments

- principle of operation and design of a multiple-disk clutch

Specification

- [1] hand-operated cutaway model demonstrating the function of a multiple-disk clutch
- [2] industrial original component, fully functional cutaway model
- [3] solid metal base plate, handles

Technical data

Multi-disc clutch

- max. friction force: $0,5\text{N}/\text{mm}^2$
- voltage: 24V
- power: 37W
- permitted speed: 4000min^{-1}
- permitted torque: 20Nm

LxWxH: 350x300x200mm

Weight: approx. 6kg

Scope of delivery

- 1 cutaway model
- 1 description
- 1 sectional view

Description

■ demonstration of complex machine elements and demonstration of their principle of operation

Using cutaway models it is possible to clearly demonstrate the operational principles of complex machine elements such as a multi-disc clutch, various gear units or a pedestal bearing. The GL 300.01 to GL 300.12 cutaway models form a meaningful addition to the assembly kits, models and model kits for the engineering drawing discipline.

In order to be able to use the cutaway models in engineering teaching, each model comes with a standards-compliant and practical drawing and a technical description.

Problems of engineering drawing, fasteners and machine parts or production and testing technology can be studied in a clear and practical manner using the cutaway models.

The cutaway models represent original components in which the active parts are clearly visible to the user while fully maintaining their mechanical functionality. Each of the cutaway models is securely mounted on a base plate, which also has handles to allow them to be carried. They are powered by hand.