


4-Ways Resistor Power Divider DC-67GHz, 1.85mm Female

2022-4-27

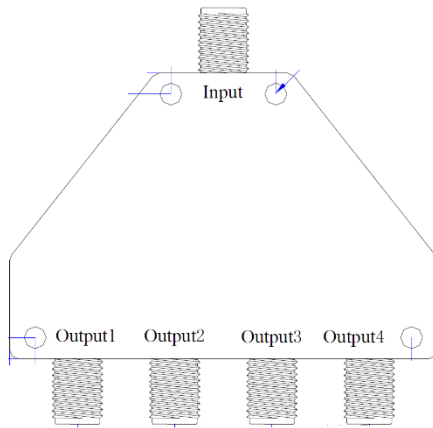

Product Overview

AT Microwave offers high performance and broadband power divider from DC-67GHz, with SMA, 2.92mm, 2.4mm and 1.85mm connectors.

Based on our excellent design work, precise machine tolerance and outstanding quality plating, we can provide band pass filter with low insertion loss, good return loss and high rejection at the same time.

More information, please visit www.atmicrowave.com

Advantages

- ✓ Broadband Performance
- ✓ Low Insertion Loss
- ✓ Good Amplitude and Phase balance
- ✓ Good Return Loss


Application

- ✓ 5G Communication
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

Key Features

Parameter	Min	Typical	Max
Frequency Range		DC-67GHz	
Normal Power Splitting		12 dB	
Normal Phase Shift		0 Degree	
Extra Insertion Loss		-3.5dB	-4.5dB
Amplitude Balance		+/-0.4dB	+/-1.2dB
Phase Balance		+/-4 Degree	+/-12 Degree
VSWR		1.5	3.0
Isolation	6dB	10dB	
CW Power		0.5W	
Spec Temp		25C	





AT-RPD4-0067

DC-67GHz Resistor Power Divider

Mechanical Information

Item	Description
Input Port	1.85mm Female
Output Port	1.85mm Female
Case Material	Aluminum
Finish	Painted
Weight	80g
Size:	See outline

Absolute Maximum Ratings Table

Parameter	Value
RF Input Power CW	0.5W
Operating Temperature	-40 to + 85C
Storage Temperature	-65 to +125C

Notes:

1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data.



Test Data (25C)

Please note that test curves will vary slightly from unit to unit.

To be added.

Dimension: (unit in mm)

