

QHC9-5700-5900-30-S

5.7~5.9GHz, 30W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	5.7~5.9GHz
Insertion Loss:	0.5dB max.
VSWR:	1.25 max.
Isolation:	23dB min.
Amplitude Balance:	±0.3dB max.
Phase Balance:	±3°
Average Power:	30W max.
Impedance:	50Ω

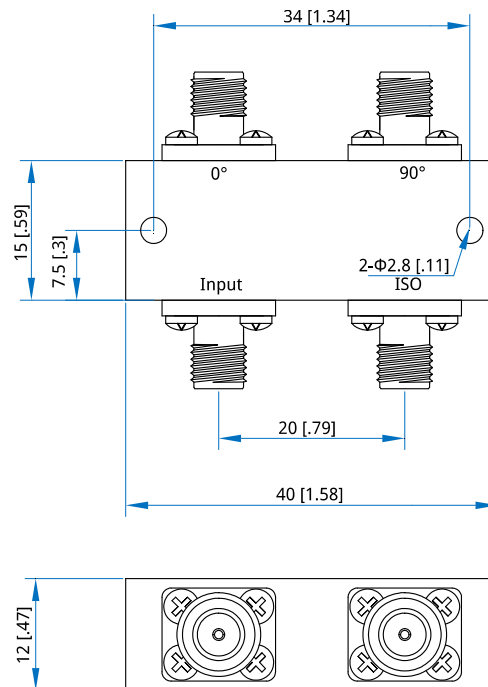
Mechanical

Size ^{*1} :	40*15*12mm 1.58*0.59*0.47in
RF Connectors:	SMA Female
Mounting:	2-Φ2.8mm through hole

[1] Exclude connectors.

Environmental

Temperature:	-45~+85°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QHC9-5700-5900-30-S

Customization is available upon request.