

QPD12-2000-6000-30-S

12-Way, 2~6GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	2~6GHz
Insertion Loss:	2.2dB max.
Input VSWR:	1.5 max.
Output VSWR:	1.4 max.
Isolation:	18dB min.
Amplitude Balance:	±0.8dB
Phase Balance:	±10°
Impedance:	50Ω
Average Power:	30W max. 2W max. as combiner

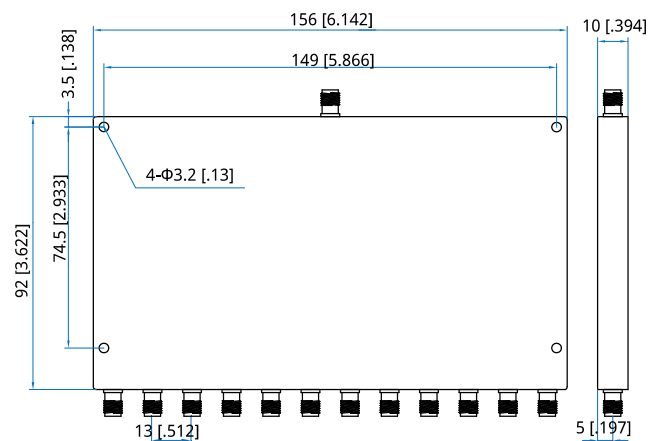
Mechanical

Size ^{*1} :	92*156*10mm 3.622*6.142*0.394in
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD12-2000-6000-30-S

Customization is available upon request.