

## QPD16-600-2000-30-S

### 16-Way, 0.6~2GHz

**Features:**

- \* Small Size
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

**Electrical**

Frequency:	0.6~2GHz
Insertion Loss:	1.4dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	±0.2dB
Phase Balance:	±2°
Impedance:	50Ω
Average Power:	30W max. 2W max. as combiner

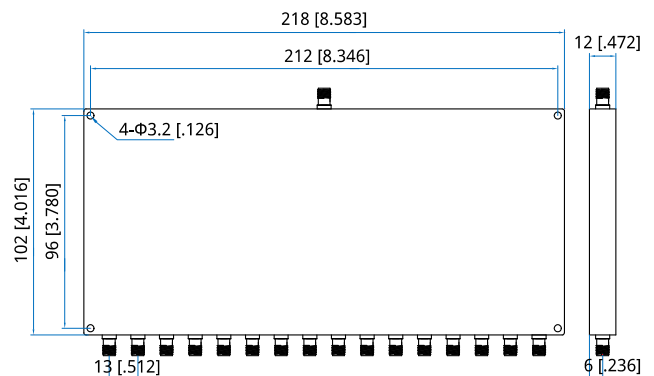
**Mechanical**

Size <sup>*1</sup> :	102*218*12mm 4.016*8.583*0.472in
Weight:	540g
Connectors:	SMA Female (Stainless steel)
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

**Environmental**

Operation Temperature:	-45~+85°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**QPD16-600-2000-30-S**

Customization is available upon request.