

QPD4-2000-2400-30-N

4-Way, 2~2.4GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	2~2.4GHz
Insertion Loss:	0.5dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	$\pm 3^\circ$
Impedance:	50 Ω
Average Power:	30W max. 2W max. as combiner

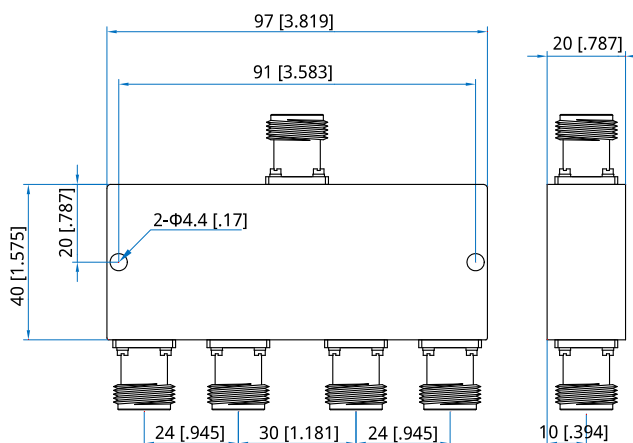
Mechanical

Size* ¹ :	97*40*20mm 3.819*1.575*0.787in
Weight:	300g
Connectors:	N Female
Mounting:	2- Φ 4.4mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ± 0.5 mm [± 0.02 in]

How To Order

QPD4-2000-2400-30-N

Customization is available upon request.