

## QPD4-600-3000

4-Way, 0.6~3GHz

**Features:**

- \* Small Size
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

**Electrical**

Frequency:	0.6~3GHz
Insertion Loss:	1.0dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.2 max.
Isolation:	18dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	±4°
Impedance:	50Ω
Average Power:	50W max. 3W max. as combiner

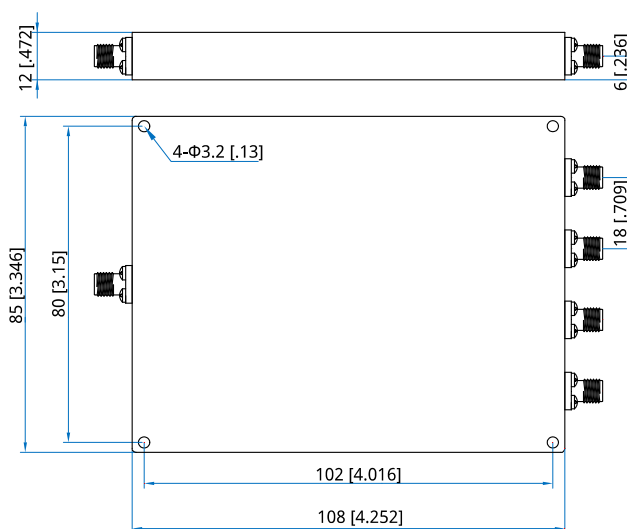
**Mechanical**

Size <sup>*1</sup> :	108*85*12mm 4.252*3.346*0.472in
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

**Environmental**

Operation Temperature:	-35~+75°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**
**QPD4-600-3000**

Customization is available upon request.