

QPD6-1-200-2-S

6-Way, 1~200MHz, 2W

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	1~200MHz
Insertion Loss:	15.9dB max.
Input VSWR:	1.2 max.
Output VSWR:	1.2 max.
Isolation:	14.6dB min.
Amplitude Balance:	±0.3dB
Phase Balance:	±3°
Impedance:	50Ω
Average Power:	2W

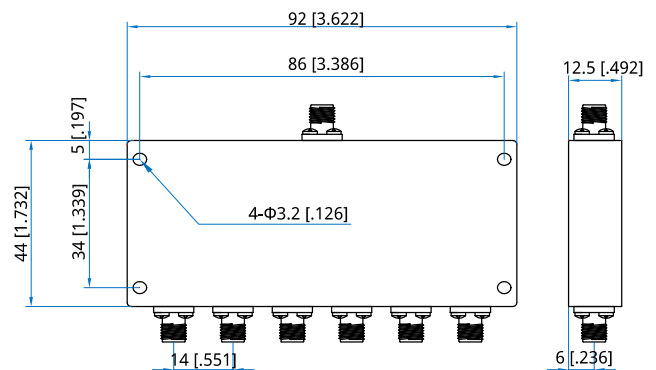
Mechanical

Size*1:	92*44*12.5mm 3.622*1.732*0.492in
Weight:	135g
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD6-1-200-2-S

Customization is available upon request.