

QPD8-6000-12000-20-SM

8-Way, 6~12GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	6~12GHz
Insertion Loss:	1.5dB max.
Input VSWR:	1.5 max.
Output VSWR:	1.3 max.
Isolation:	18dB min.
Amplitude Balance:	0.4dB
Phase Balance:	±5°
Impedance:	50Ω
Average Power:	20W max. 1W max. as combiner

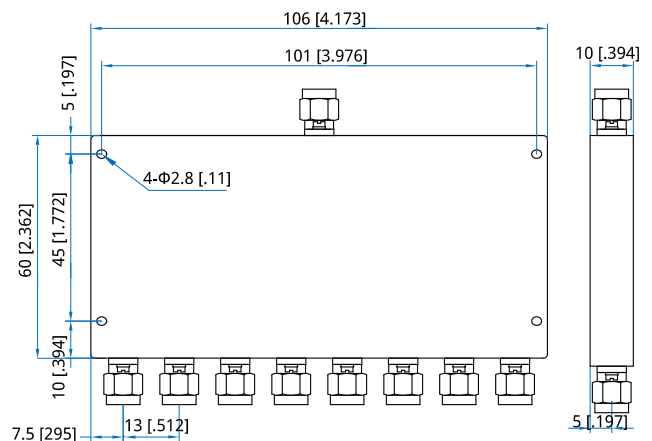
Mechanical

Size ^{*1} :	60*106*10mm 2.362*4.173*0.394in
Connectors:	SMA Male
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD8-6000-12000-20-SM

Customization is available upon request.