

QWCA-284-S

WR-284 to SMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 2.6~3.95GHz
VSWR: 1.2 max.

Mechanical

Coax Connectors: SMA
Waveguide Size: WR-284
Flange: FDP32
Material: Aluminium

How To Order

QWCA-284-X-Y-Z

X : Connector type.

Y : Configuration type.

Z : Flange type if applicable.

Connector naming rules:

S - S Male (Outline A)

SF - S Female (Outline A)

Configuration naming rules:

E - End launch

R - Right angle (Outline A)

Flange naming rules:

1 - FBP

2 - FDP (Outline A)

3 - FBM


4 - FDM

Examples:

To order a waveguide to coax adapter, WR-284 to SMA female, right angle, FDP, specify QWCA-284-SF-R-2.

Customization is available upon request.

Outline Drawings

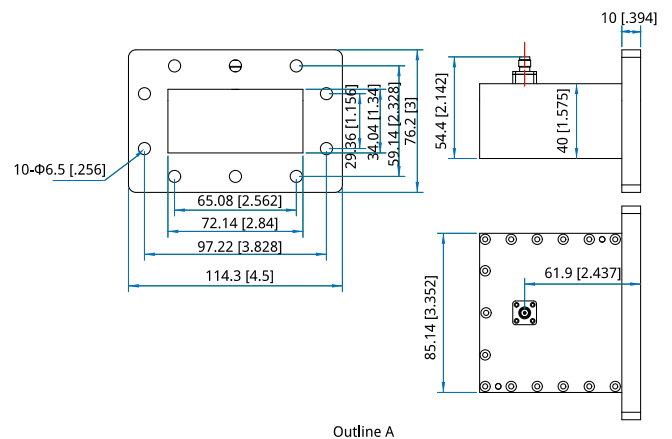

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]