



LB-90-25-C2-3.5FSPO Standard Gain Horn Antenna 8.2-12.4GHz 25dB Gain 3.5mm Female

Standard Gain Horn Antenna Operating From 8.2GHz to 12.4GHz With a Nominal 25dB Gain With 3.5mm Female Connector

Product Information

SKU	LB-90-25-C2-3.5FSPO
-----	---------------------

Description

Standard Gain Horn Antenna LB-90-25-C2-3.5FSPO, operating from 8.2 to 12.4GHz with a nominal 25dB gain and low VSWR 1.25:1 with 3.5mm Female connector output. The model LB-90-25-C2-3.5FSPO has uniform gain through its frequency span, providing efficient performance characteristics and directionality. It can handle 50W continuously and 100W peak power. Constructed of lightweight corrosion-resistant aluminum, the horn comes with a specially designed weatherproof radome which provides excellent protection against the rain and dust but has very little loss across the full operating frequency band. This standard gain horn antenna is linearly polarized and ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications.

Technical Specification


Electrical Specification		Interface	
Frequency, Min (GHz)	8.2	Output Type	Coaxial
Frequency, Max (GHz)	12.4	Connector	3.5mm
Waveguide Type	Rectangular	Connector Gender	Female
Waveguide Size EIA WR	WR90	Mechanical Specification	
Gain, Typ (dBi)	25	Figure	C Type
Polarization	Linear	Body Material	Al
3dB Beamwidth, E-Plane, Typ (Deg.)	8	Finish	Chemical Conversion Coating, Gray Paint
3dB Beamwidth, H-Plane, Typ (Deg.)	10	Size, W (mm)	255
Cross Pol. Isolation, Typ (dB)	35	Size, H (mm)	215
VSWR, Typ	1.25:1	Size, L (mm)	684
Impedance, (Ohm)	50	Weight, (kg)	1.96
Power Handling, CW, (W)	50		
Power Handling, Peak, (W)	100		

Additional Information


Application	Outdoor, Waterproof and Dustproof, Fixed	Solution for	Gain Reference Antenna Measurement Reflector Feed Far-field Measurement System Intergration Material Measurement
-------------	--	--------------	---

Outline Drawing


3.5mm Female Output with Radome (Option, P/N: LB-90-25-C2-3.5FSPO, Outdoor Application)

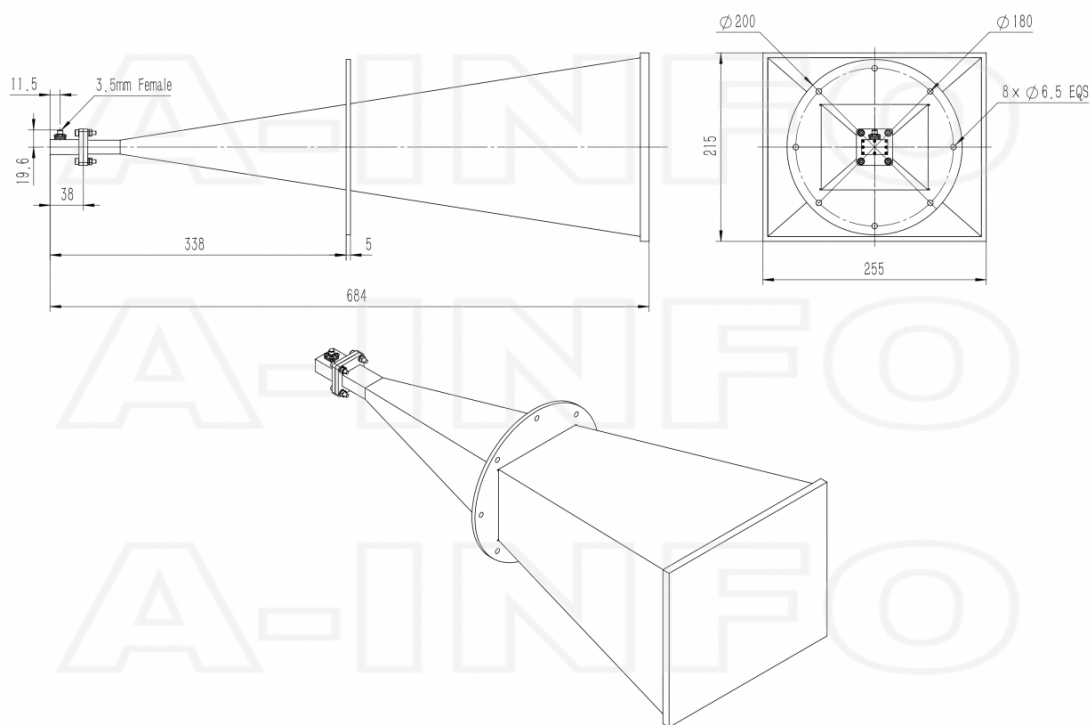

3.5mm Female Output with Round Mounting Bracket & Radome (Option, P/N: LB-90-25-MB2 & LB-90-25-C2-3.5FSPO, Outdoor Application)

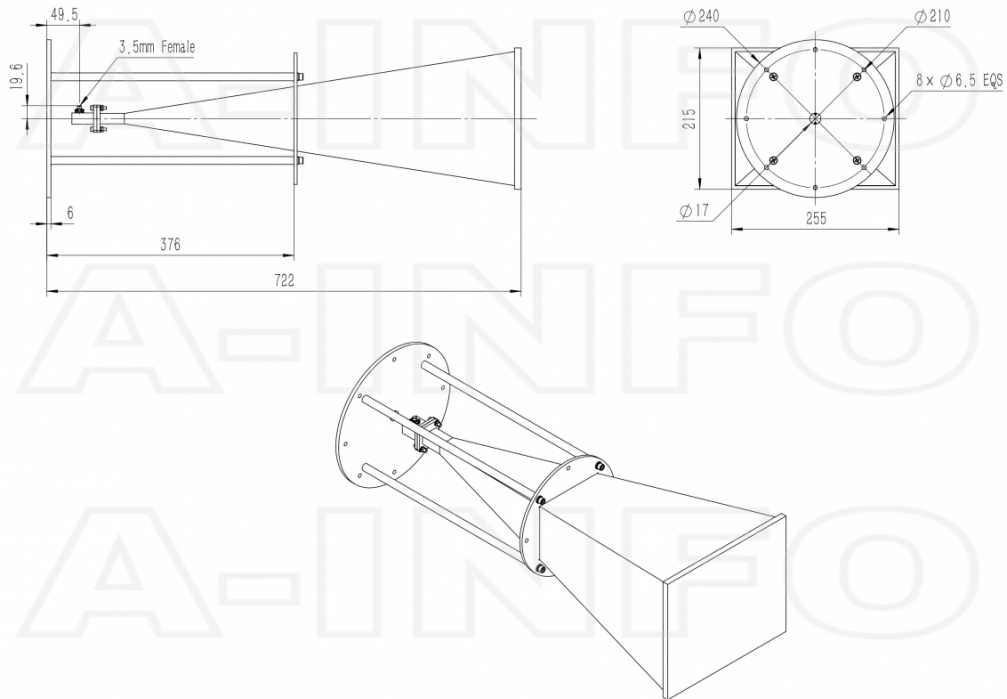


3.5mm Female Output with L Type Mounting Bracket & Radome (Option, P/N: LB-90-25-L2 & LB-90-25-C2-3.5FSPO, Outdoor Application)

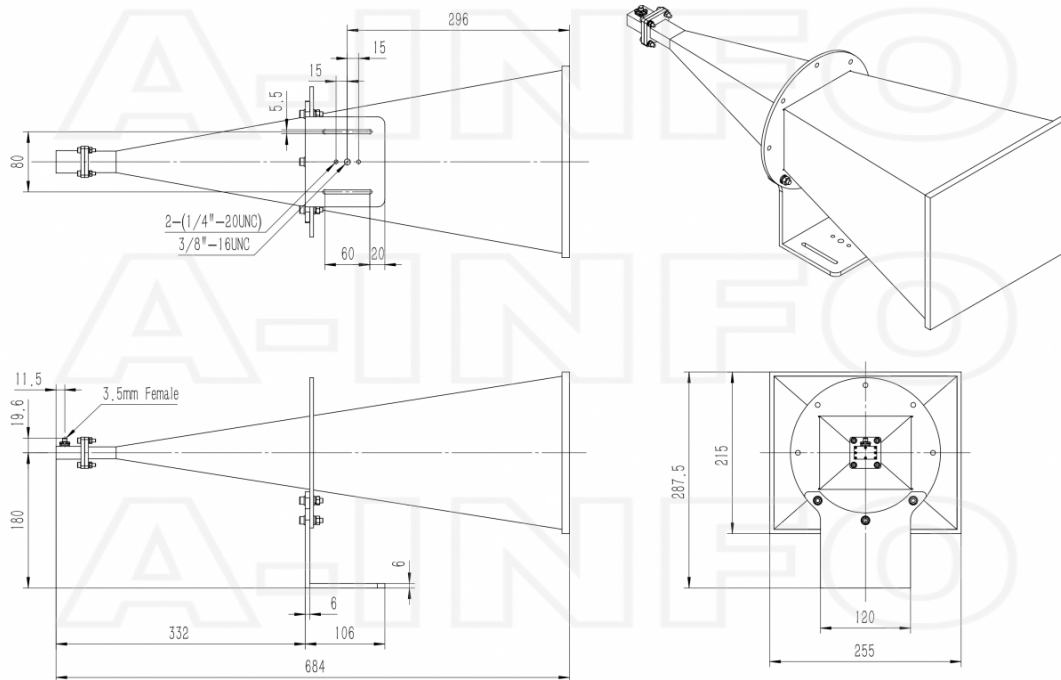


Typical Test Results

Gain

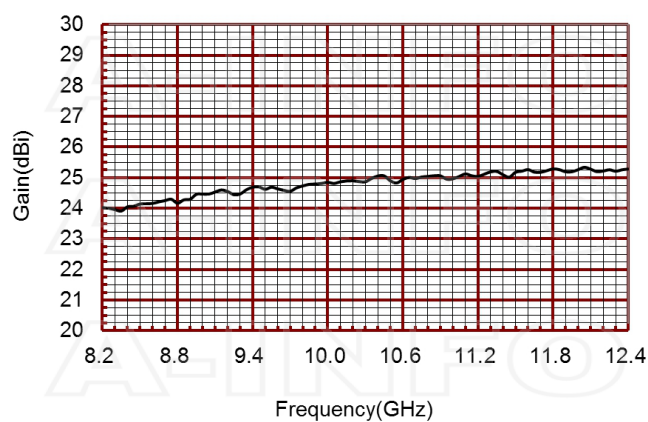


Antenna Factor

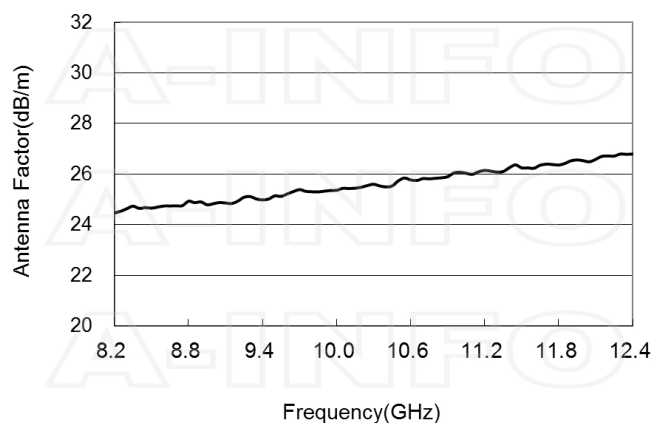


Antenna Factor (Table)

Frequency(GHz)	Gain(dBi)	Antenna Factor(dB/m)
8.20	24.02	24.46
8.50	24.14	24.66
9.00	24.46	24.83
9.50	24.62	25.15
10.00	24.85	25.36
10.50	24.90	25.74
11.00	24.96	26.07
11.50	25.18	26.25
12.00	25.26	26.53
12.40	25.28	26.80



Cross Polarization Isolation






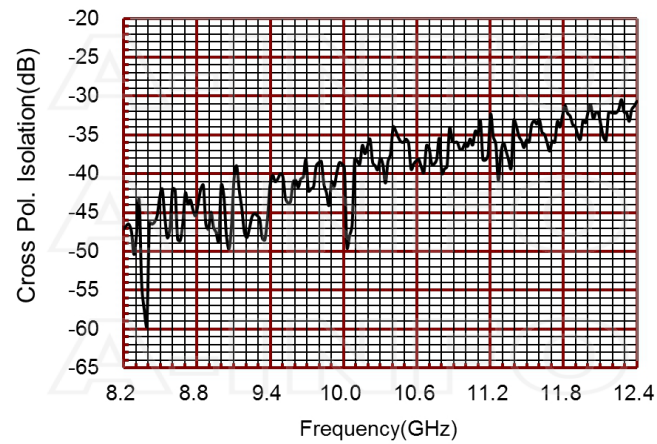




VSWR

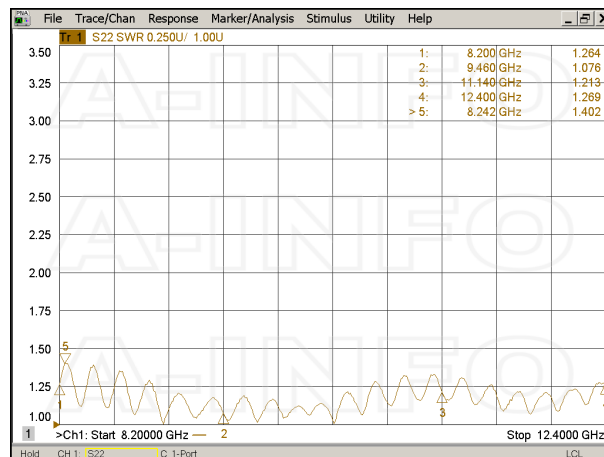

Pattern

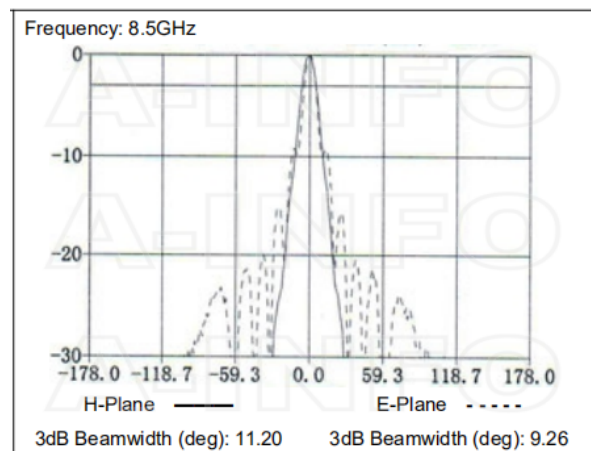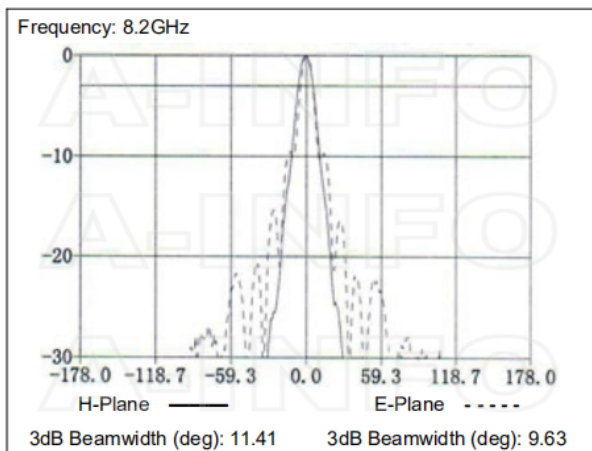

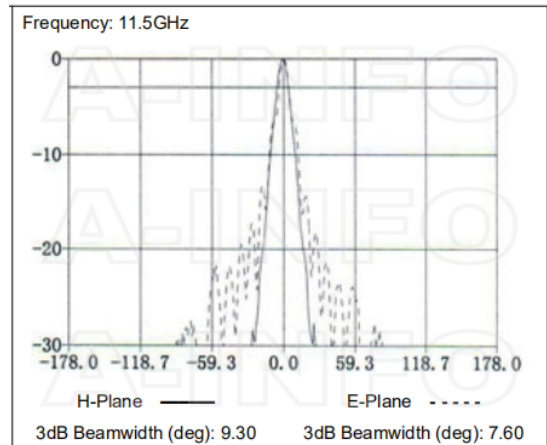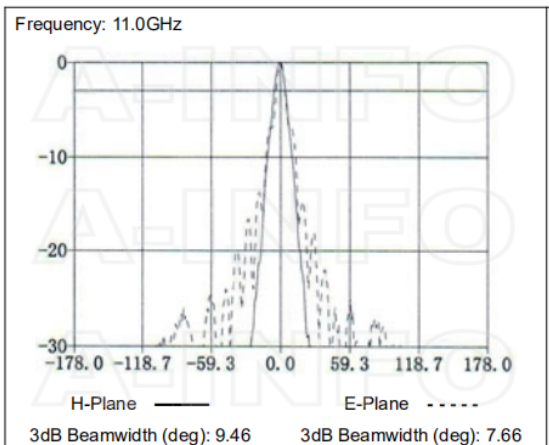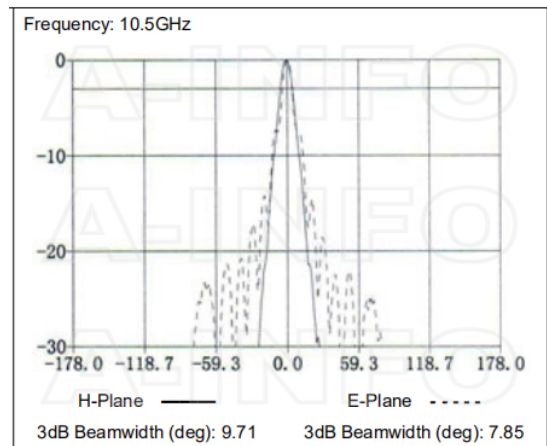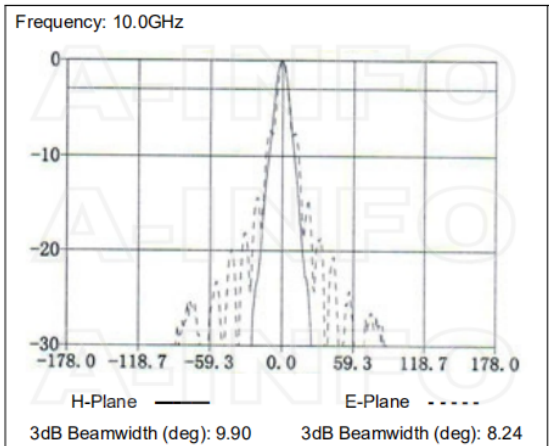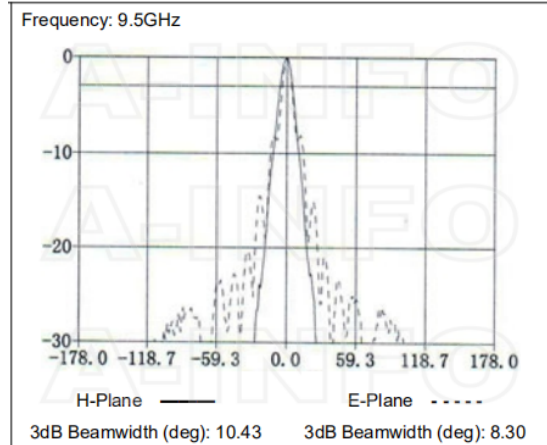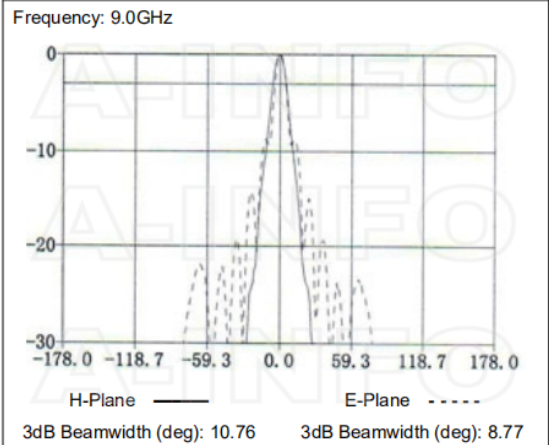

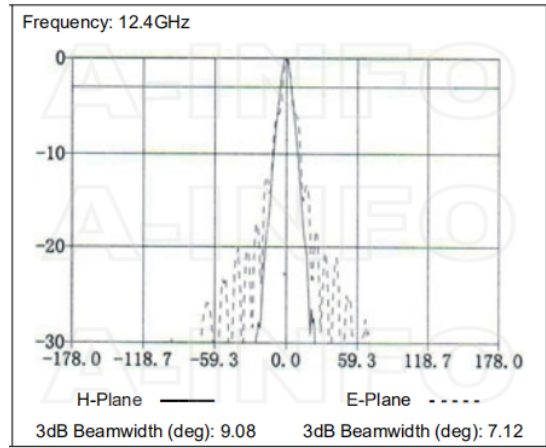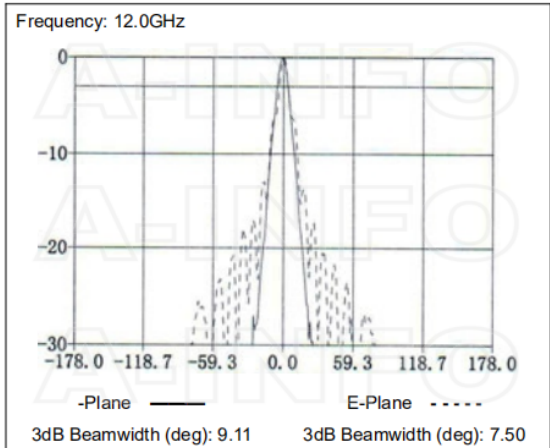

Related Products



LB-90-25-MB2 Round Type
Mounting Bracket



LB-90-25-L2 L Type Mounting
Bracket



Tripod_15Kg Al Alloy Tripod



3033HL Wooden Tripod



3033QM Wooden Tripod
Metalfree



M4x20 Hex_Pack WR112- WR51
Flange Assembly Pack



M4x30 Hex_Pack Log Periodic, DS
Assembly Pack

Similar Products



LB-90-25-A2 Standard Gain Horn Antenna 8.2-12.4GHz 25dB Gain Rectangular Waveguide Interface



LB-90-25-A2SPO Standard Gain Horn Antenna 8.2-12.4GHz 25dB Gain Rectangular Waveguide Interface



LB-90-25-C2-SF Standard Gain Horn Antenna 8.2-12.4GHz 25dB Gain SMA Female



LB-90-25-C2-SFSPO Standard Gain Horn Antenna 8.2-12.4GHz 25dB Gain SMA Female



LB-90-25-C2-NF Standard Gain Horn Antenna 8.2-12.4GHz 25dB Gain N Type Female



LB-90-25-C2-NFSPO Standard Gain Horn Antenna 8.2-12.4GHz 25dB Gain N Type Female



LB-90-25-C2-TF Standard Gain Horn Antenna 8.2-12.4GHz 25dB Gain TNC Female



LB-90-25-C2-TFSPO Standard Gain Horn Antenna 8.2-12.4GHz 25dB Gain TNC Female



LB-90-25-C2-7 Standard Gain Horn Antenna 8.2-12.4GHz 25dB Gain 7mm



LB-90-25-C2-7SPO Standard Gain Horn Antenna 8.2-12.4GHz 25dB Gain 7mm



LB-90-25-C2-3.5F Standard Gain Horn Antenna 8.2-12.4GHz 25dB Gain 3.5mm Female

About this Datasheet

• Product Information
 Product Link:
<https://www.ainfoinc.com/lb-90-25-c2-3-5fspo-standard-gain-horn-antenna-8-2-12-4-ghz-25db-gain-3-5mm-female>
 Data subject to change without notice.
 © A-INFO INC. 2023. All Rights Reserved

• Contact Us
 Address:dd
 60 Tesla, Irvine, CA 92618, USA

 Website:
www.ainfoinc.com

 Email:
sales@ainfoinc.com

• Phone & Fax
 Phone:
 +1-949-639-9688
 +1-949-639-9608

 Fax:
 +1-949-639-9670